

IP NETWORK CAMERA


IPB4MIRW



Features

- 4 Megapixel Recording
- Outdoor Rated IP66
- IR LED's – up to 100ft
- True Wide Dynamic Range 120dB
- True Day / Night
- H.265 Compression
- Smart Event
 - Line Crossing
 - Intrusion Detection
- ONVIF Compliant
- PoE

Diagram

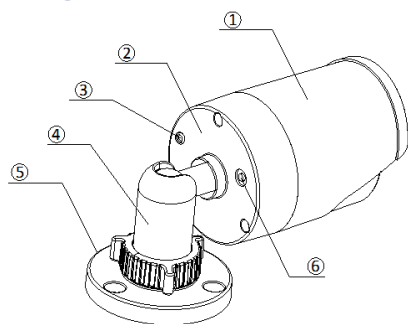

1. Sun Shield
2. Back Box
3. Grounding Screw
4. Adjustable Bracket
5. Mounting Base
6. Reset

Part Number	IPB4MIRW
Resolution	2688 x 1520
Frame Rate	20fps(2688x1520) 30fps(1920x1080) 30fps(1280x720)
Image Sensor	1/3" Progressive Scan CMOS
Lux Rating	0.028 Lux @ F2.0, 0 Lux with IR
Shutter	1/30s ~ 1/100,000s
Lens	4mm IR Cut Filter
IR Range	30 Meter (99ft)
DNR	3D DNR
WDR	True Wide Dynamic Range 120dB
Compression	H.265 / H.264+ / MJPEG
H.264 Codec	Main Profile
Bit Rate	32Kbps ~ 16Mbps
Image Settings	Saturation, Brightness, Contrast, Sharpness
BLC	Configurable by Zone
Network Storage	NAS
Alarm Trigger	Motion, Alarm, Network Disconnect, IP Conflict, Storage Exception
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos
Interoperability	ONVIF, PSIA, CGI
Security	User Authentication, Reset Button, Flickerless, Dual Stream, Heartbeat, Mirror, Watermark
Communication	1-RJ45 10M / 100M Ethernet Interface
Operating Temp	-30 °C ~ 60 °C (-22 °F ~140 °F) Humidity 95%
Power Supply	12 VDC ± 10% , PoE (802.3af)
Power Consumpt	7W with IR
Weather Rating	IP66

