


IPWB3MIRMVF

3MP IR WDR Bullet Camera


Specifications

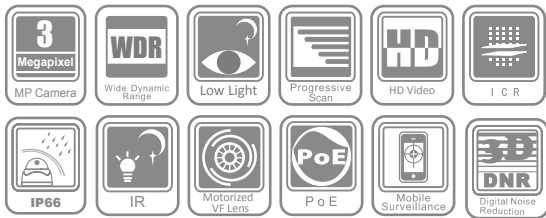

Key features

- 3.0 Megapixel (2048 x 1536) High Resolution
- HD1080p Real-time Streaming
- 120dB Wide Dynamic Range
- Motorized VF Lens
- 3D Digital Noise Reduction
- True Day / Night
- IP66
- Up to 30m IR Range

Dimensions

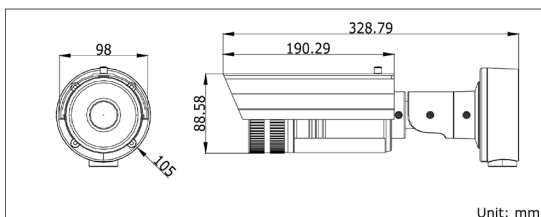

Camera	IPWD3MIRMVF
Image sensor	1/3" progressive scan CMOS
Min. illumination	0.17 lux @F1.6, AGC ON 0 lux with IR
Shutter time	1/30 s ~ 1/100,000 s
Lens	2.7 ~ 9 mm @F1.6, angle of view: 101° ~ 30.4° Motorized VF lens
Lens mount	Φ14
Auto iris	DC drive
Day & night	IR cut filter with auto switch
Wide dynamic range	120 dB
Digital noise reduction	3D DNR
Compression Standard	
Video compression	H.264 / MPEG4 / MJPEG
Bit rate	32 Kbps ~ 16 Mbps
Audio Compression	-S: G.711/G.726
Dual stream	Yes
Image	
Max. Image Resolution	2048 × 1536
Frame rate	15fps (2048 × 1536), 30fps (1920 × 1080), 30fps (1600 × 1200)
Image settings	Saturation, brightness, contrast adjustable through client software or web browser
Network	
Network storage	NAS
Alarm trigger	Motion detection, tampering alarm, network disconnect, IP address conflict, storage exception
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos
Security	User authentication, watermark
Interface	
Communication interface	1 RJ45 10 M / 100 M Ethernet interface
General	
Operating conditions	-10 °C ~ 60 °C (14°F ~ 140 °F) humidity 90% or less (non-condensing)
Power supply	12 VDC ± 10% , PoE (802.3af)
Power consumption	Max. 12W
Weather proof rating	IP66
IR range	Approx 20 to 30 meters
Dimensions	98 × 88.58 × 328.79 mm (3.86" × 3.49" × 12.94")
Weight	1700 g (3.75 lbs)